



FD16 Roof Area Divider Detail

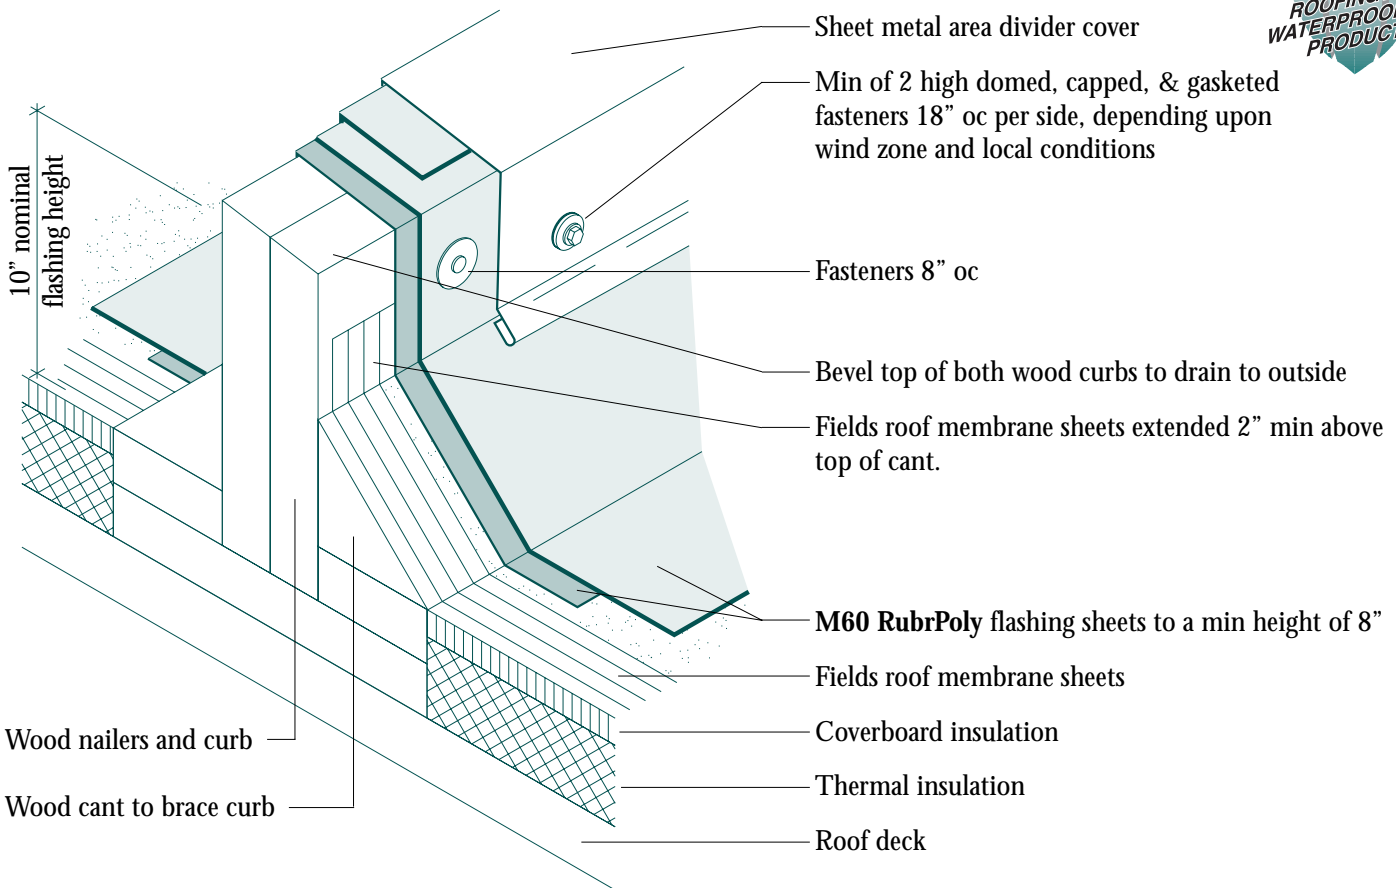

Side View

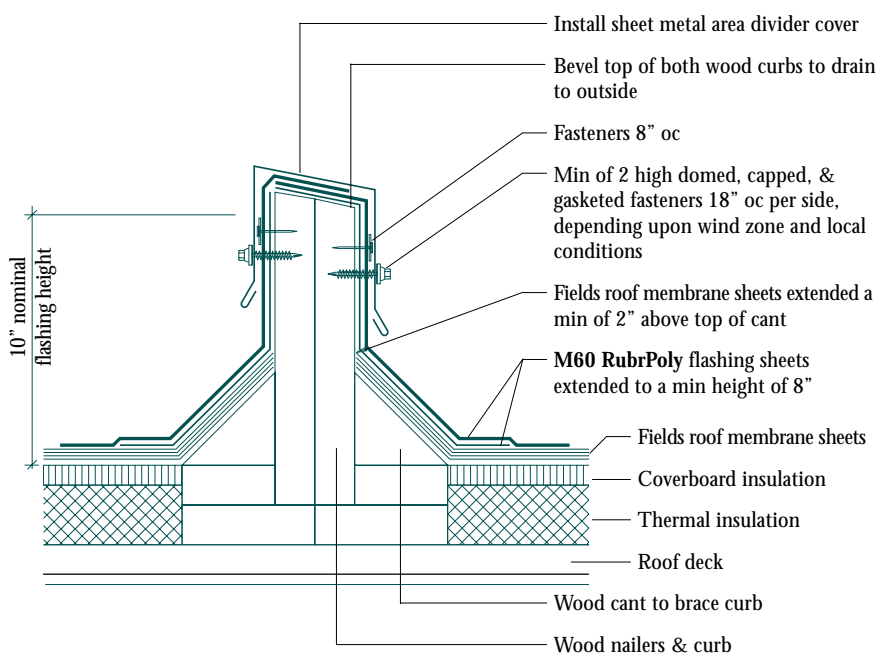

Notes

1. An area divider shall be designed as a raised double wood member attached to a securely fastened wood base plate that is anchored to the roof deck. Area dividers shall be located between the roof's expansion joints at about 150' to 200' intervals, depending upon climatic conditions. Area dividers are prohibited from restricting the flow of water.
2. The flashing requirements are the same for both sides of the area divider.
3. Attach the treated wood nailer to the deck with suitable fasteners.