


FD18 Gravel Stop Metal Roof Edge Detail

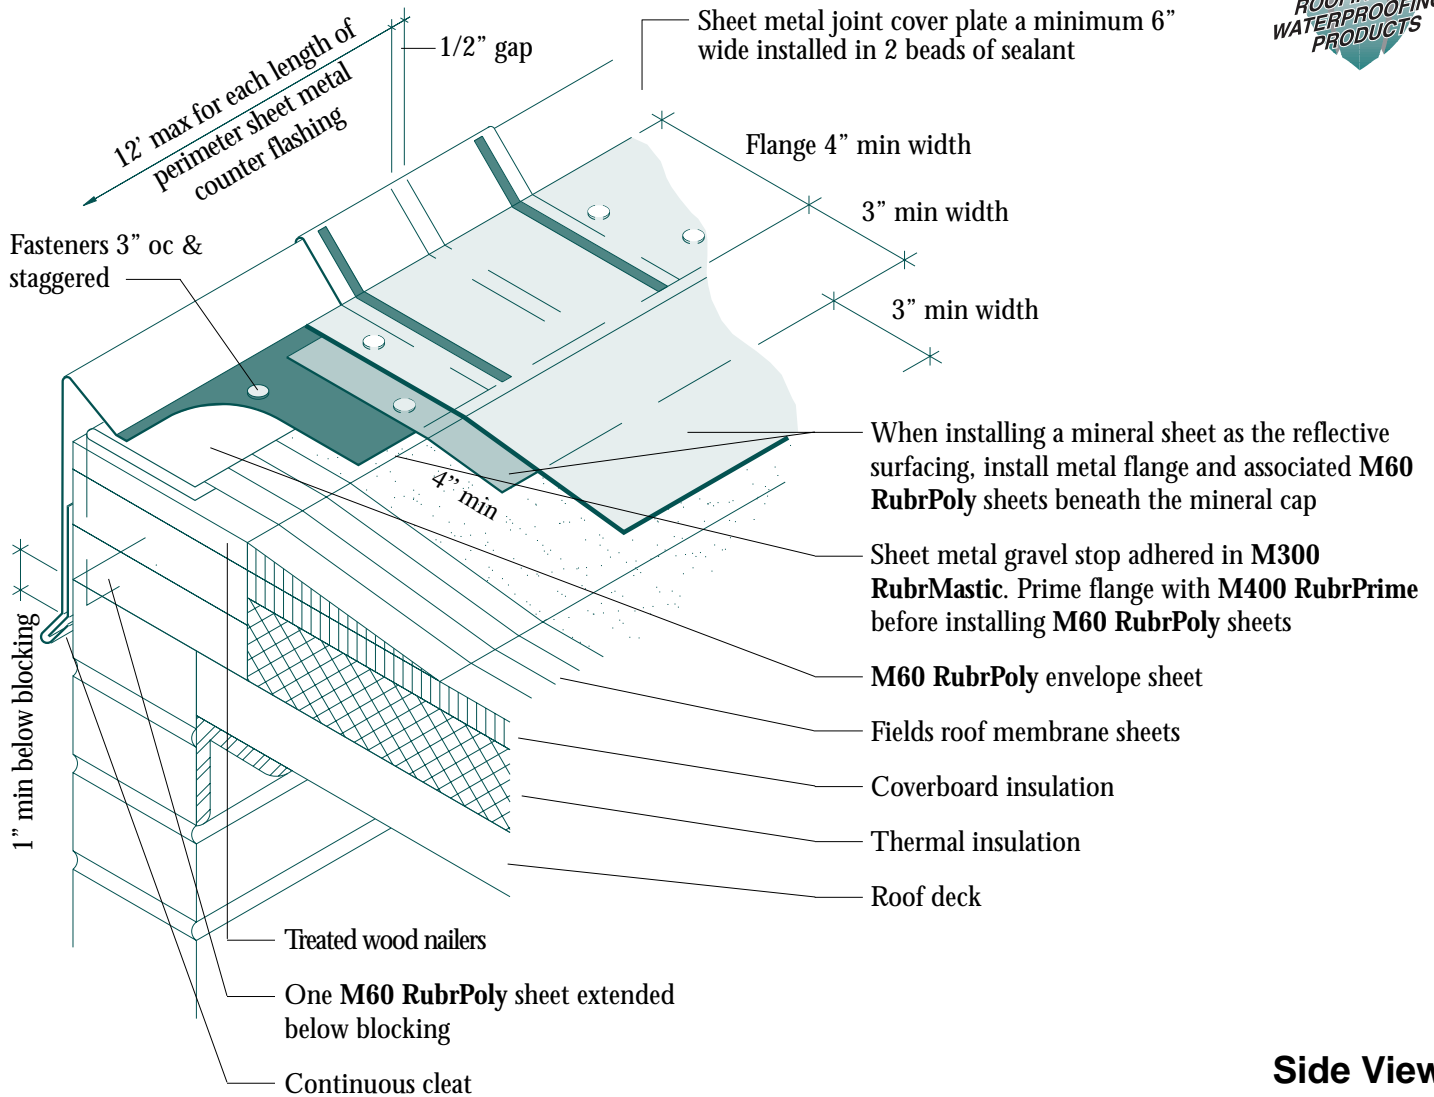

Side View

Notes

1. Rigid metal flanges are prohibited from being installed between the roofing sheets. See "Raised Metal Roof Edge Detail FD17" for perimeter construction.
2. This detail shall be installed only where the deck is supported by the outside wall.
3. Attach treated wood nailer to the wall with suitable fasteners.
4. Wood blocking shall be slotted for venting wet filled decks.
5. Frequent nailing of sheet metal flange is required to minimize thermal movement.

